


Recommended PCB Layout
Tolerance: ±0.05

Pin Assignments

PIN	Name
C1	Vcc
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	Vpp
C7	I/O
C8	Reserved




- NOTE:
- Material & Finish See Table:
 - Circuit Diagram For Switch

3. Characteristic:

- 3-1. Current Rating :1A max.
- 3-2. Contact Resistance:100mOhms max
- 3-3. Insulation Resistance:100MOhms min./500VDC
- 3-4. Dielectric Withstanding Voltage:500VAC/minute
- 3-6. Durability: 2000 Cycles
- 3-7. Operating Temperature:-25°C to +85°C

4. Please Contact PROMAX Sales Representative to Verify Product Details

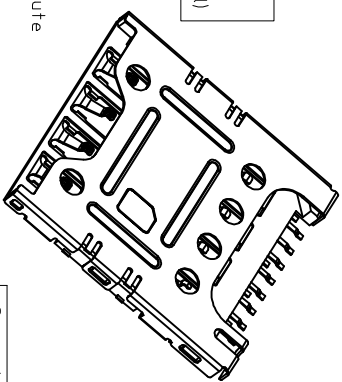

Item	Part Name	Material
4	Shell	Stainless Steel
3	Housing	Thermoplastics
2	Detect	Copper Alloy
1	Terminal	Copper Alloy

Description
Nickel Under Plated Overall: g/f Plated on solder tails
Black, UL94V-0
Gold Flash on Solder Tails and Contact Area;
Nickel Under Plated Overall;
Gold Flash on Solder Tails and Contact Area;
Nickel Under Plated Overall.

深圳市迈瑞康电子有限公司

TITLE: MICRO SIM CARD CONN HL 24

PART NO. MK-SM05-124-0014

PRODUCT SPEC. MICRO SIM CARD

FILE NAME: SCALE 1:1 UNIT:mm A4 SHEET:1 of 1

General	Angle	Design	Check	APPRO.	DATE
X±0.50	X±2°	DESIGN	DESIGN	jack he	15'/03/22
X±0.30	X±1°	CHECK	CHECK		
.XX±0.20	.XX±0.5°				

General TOLERANCE UNLESS OTHERWISE NOTED	APPRO.	DATE
NEW RELEASE	jack he	15'/03/22

DESCRIPTION	CHANGE APPRO.	DATE
NEW RELEASE	jack he	15'/03/22

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A	15'/03/22	NEW RELEASE