


P.C.B LAYOUT

TOP VIEW(General Tolerance ± 0.05)

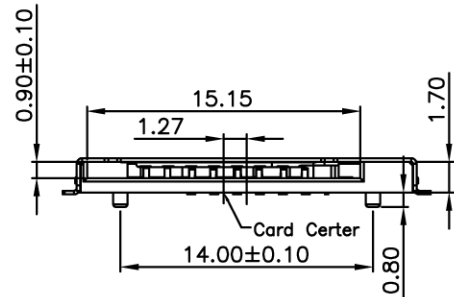

Specification

* Electrical Characteristics :

Current Rating:0.5A.

Withstanding Voltage:AC500V r.m.s.

Insulation Resistance:1000Megohms Minimum at DC 500V.

Contact Resistance:100Miliohms Maximum.

*Mechanical Characteristics:

Mating Cycles: 5000 Insertions.

* Environmental :


Operating Temperature:-40°C to +60°C.

* Material:

1.Housing:HI-Temp plastic UL 94V-0 Rated.

2.Contact:Copper Alloy.

3.Shell:Copper Alloy.

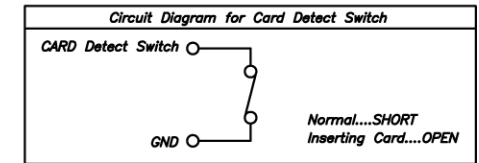

						OPERATION	DRAW			SCALE	1:1	深圳市迈瑞康电子有限公司	
						~ 10	±0.15			UNIT	mm		
						10 ~ 30	±0.30			SIZE	A4	PART NO.	MRK-SM05-190-0000
A0	07/11/23		NEW			30 ~	±0.40			SHEET	1/1	TITLE:	
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 2'			PROJ.	◆	DRAWING NO.	
						DIM	TOL	APPROVE					