
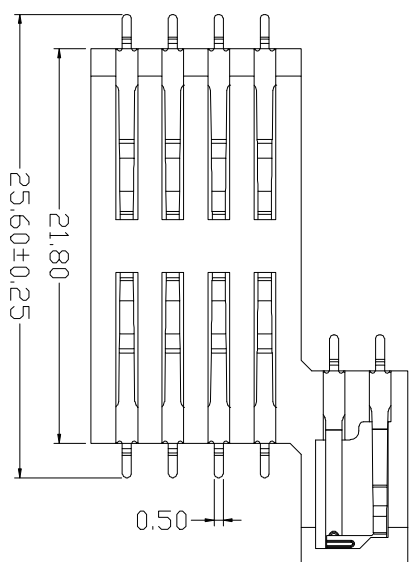
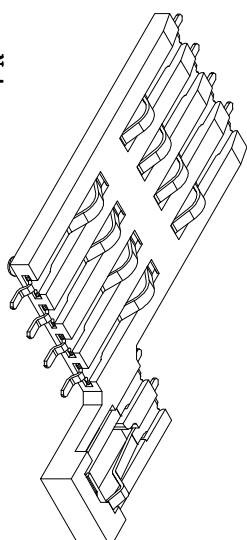
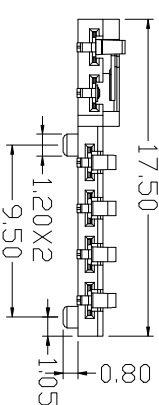
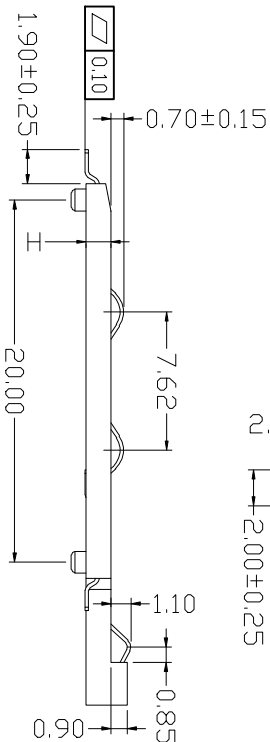
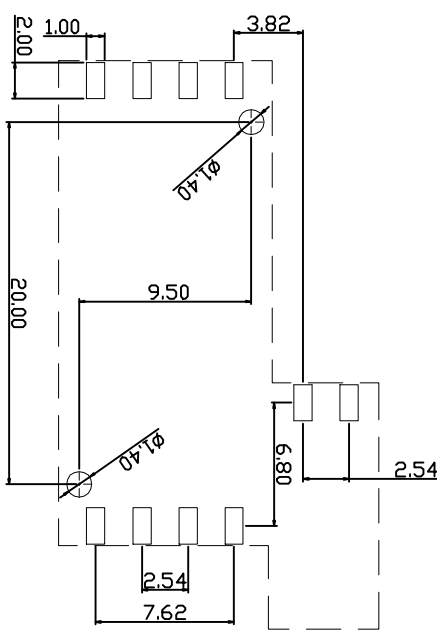


Recommended P.C.B Layout(Top Side)

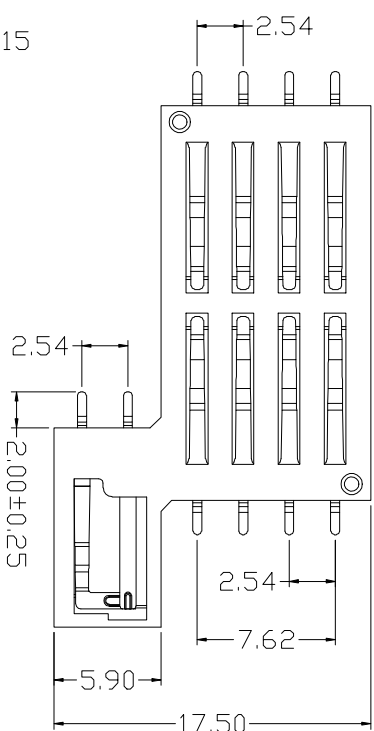

H	PART NO.
1.40	
2.00	
2.50	
3.00	
3.40	
4.20	
4.70	

Notes:
 Material: Phosphor Bronze(C5191-H)
 SIMM Card Connector,With
 Physical:
 Housing: LCP(NY 9T) UL 94V-0
 Contact: Selective Gold Flash
 Specifications:
 Voltage Current rating: 1A, 50V AC
 Insulation Resistance: 1000Mohm Min
 Contact Withstanding Voltage:
 AC 500V For 1 Minute
 Temperature Rating: -40° To +85°

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DESIGN	SCALE	PART NO.
A0	07/10/20	NEW			0.00 ±0.15		1:1	MRK-SM04-254-0016
					0.0 ±0.30	CHECK	mm	Smart Card 8Pin 左开关
					0 ±0.40	APPROVE	A4	
					Angle 0		1/1	
					DIM ± 3°		PROJ.	
					TOL			

深圳市迈瑞康电子有限公司