
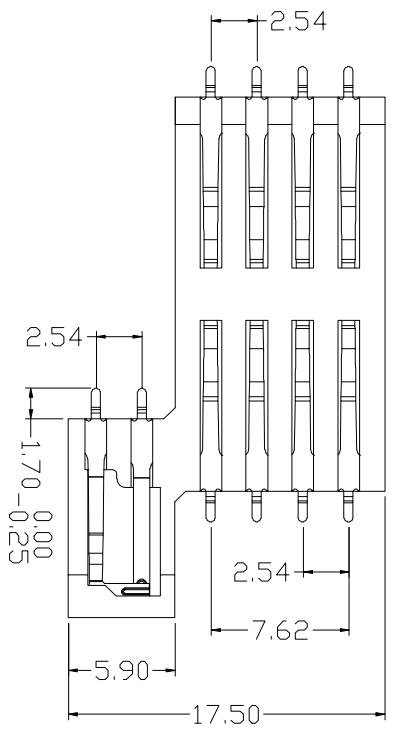
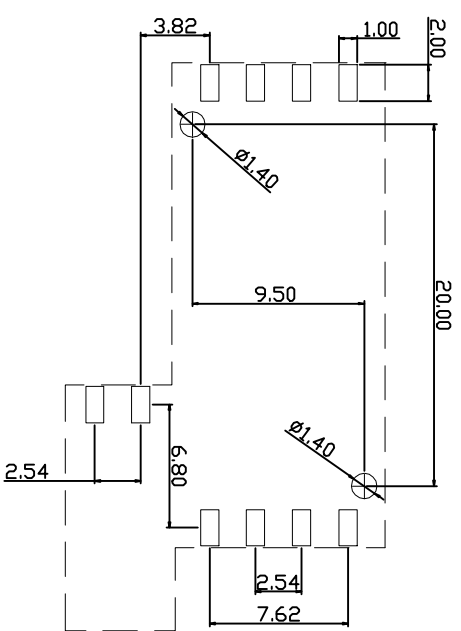
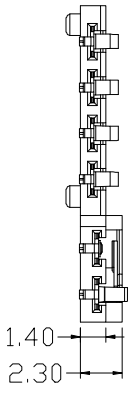


Recommended P.C.B Layout(Top Side)

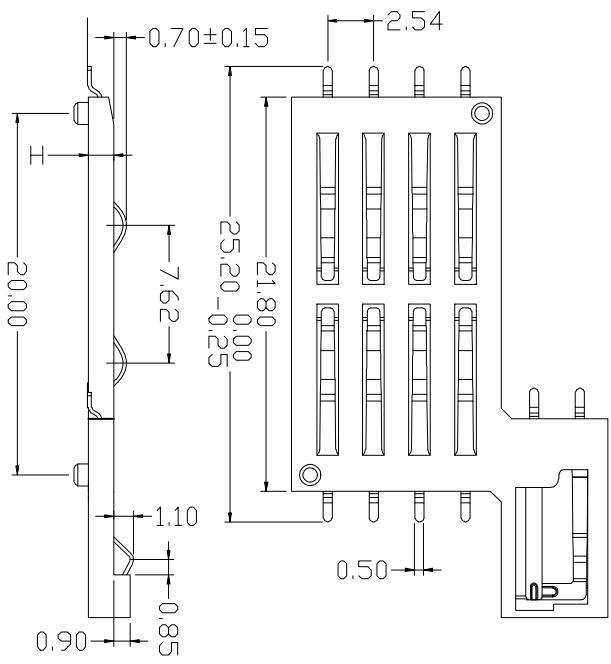

H	PART NO.
1.40	
2.00	
2.30	
3.00	
3.40	
4.20	
4.70	

**SIMM Card Connector,With**  
**Physical:**  
 Housing: ICP(NY 9T) UL 94V-0  
 Contact: Selective Gold Flash  
**Specifications:**  
 Voltage Current rating: 1A, 50V AC  
 Insulation Resistance: 1000Mohm Min  
 Contact Withstanding Voltage:  
 AC 500V For 1 Minute  
 Temperature Rating: -40° To +85°

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	07/10/20	NEW		

OPERATION	DESIGN
0.00 ±0.15	
0.0 ±0.30	CHECK
0 ±0.40	APPROVE
Angle ± 3°	
DIM TOL	

SCALE	UNIT	PART NO.
1:1	mm	
SIZE	A4	
SHEET	1/1	TITLE:
PROJ.		DRAWING NO.

**深圳市迈瑞康电子有限公司**

MK-SM04-254-0017

SIMI SMART CARD 8PIN右开关