



- NOTES:
- ELECTRICAL CHARACTERISTICS
 - CONTACT RESISTANCE: 100 Milliohms. Max
 - INSULATION RESISTANCE: 1,000 Megohms Min.
 - VOLTAGE RATING: 50V.
 - CURRENT RATING: 1.0A.
 - MECHANICAL CHARACTERISTICS
 - OPERATION TEMPERATURE RANGE: -20°C~+85°C
 - DURABILITY: 5000 CYCLES
 - MATERIAL:
 - HOUSING: THERMOPLASTIC UL 94-V0
 - CONTACT: COPPER ALLOY, T=010
 - SHELL: STAINLESS STEEL, T=015
 - FINISHED:
 - CONTACT: NI PLATED UNDER/AV PLATED ON CONTACT AREA/G/F PLATED ON SOLDER TAIL
 - SHELL: NI PLATED UNDER/G/F PLATED ON SOLDER TAIL

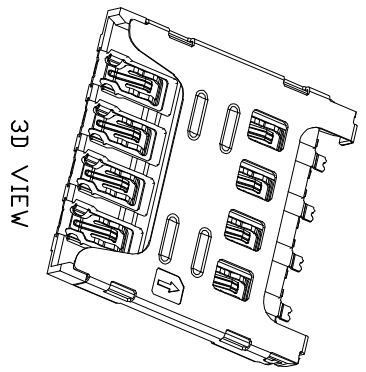

PIN No.	DESCRIPTION
C1	VCC (SUPPLY VOLTAGE)
C2	RST (RESET SIGNAL)
C3	CLK (CLOCK SIGNAL)
C4	RESERVED
C5	GND
C6	TPV (VARIABLE SUPPLY VOLTAGE)
C7	I/O DATA INPUT/OUTPUT
C8	RESERVED

General	Angle	设计	设计	设计	设计
X±0.50	X±1.2°	DESIGN	WEN	16'/11/28	
X±0.30	X±1°	CHECK	WEN	16'/11/28	
.XX±0.20	.XX±0.5°	APPRO.	WEN	16'/11/28	

变更通知单号	版本	日期	说明	变更	承认	变更	承认	变更	承认
ECN(DCN) NO.	KEY	DATE	DESCRIPTION	CHANGES	APPRO.	CHANGES	APPRO.	CHANGES	APPRO.
	A	16'/11/28	新发行	赵文博					
	B	17'/11/20	修改产品结构						

深圳市迈睿康科技有限公司	
TITLE:	MICRO SIM卡封装PIN H1.5mm
PART NO.	MRC-SM03-150-0007
FILE NAME:	
SCALE:	1:1
UNIT: mm	
ASSEMBLY:	
SHEET:	1 of 1