
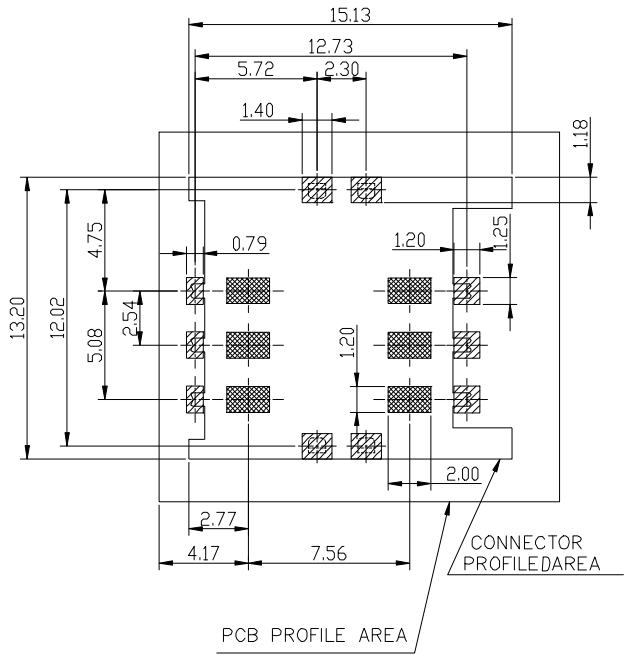
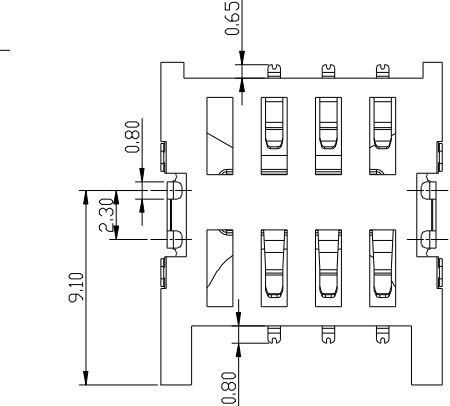


REV.	DESCRIPTION	APPD	DATE

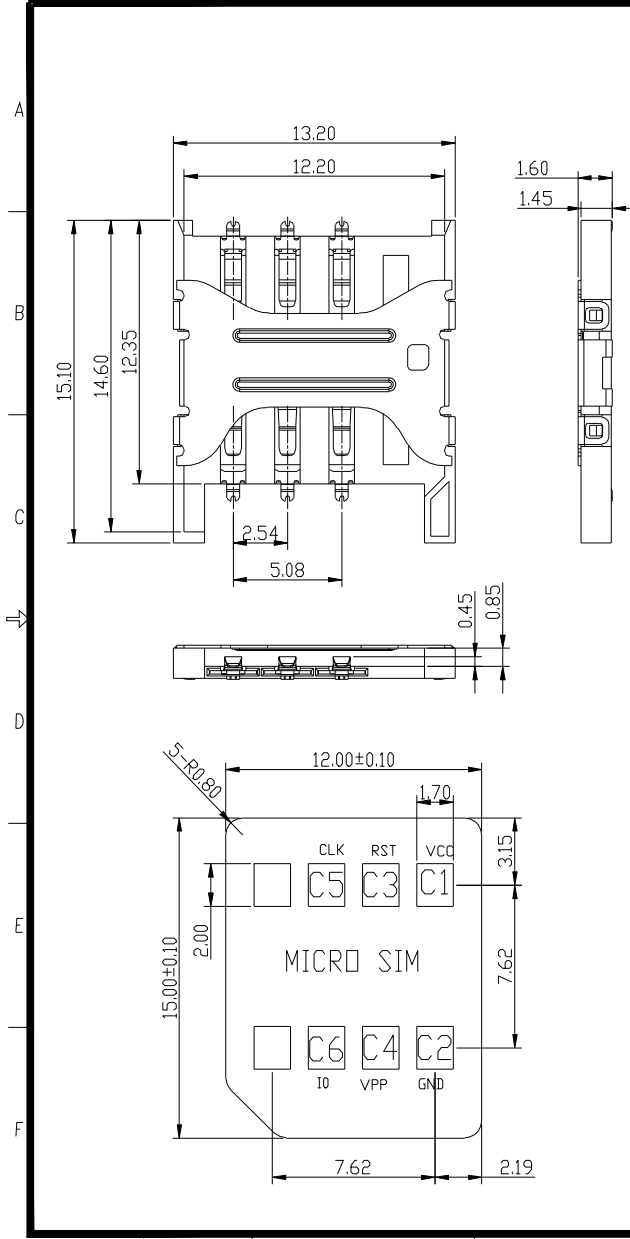

- NOTES:**
- 1. MATERIAL:**
 - 1). HOUSING MATERIAL: THERMOPLASTIC UL94V-0; COLOR: BLACK
 - 2). CONTACT MATERIAL: COPPER ALLOY, T=0.16mm
 - 3). SHELL MATERIAL: STAINLESS STEEL, T=0.16mm
 - 2. FINISH:**
 - 1). CONTACT FINISH: 60u" MIN. NICKEL UNDER PLATED, PLATED 3u" Au ON CONTACT AREA ; PLATED GOLD FLASH ON SOLDER AREA.
 - 2). SHELL FINISH: 60u" MIN. NICKEL UNDER PLATED, PLATED GOLD FLASH ON SOLDER AREA.
 - 3. ELECTRICAL SPECIFICATIONS:**
 - 1). VOLTAGE RATING: 12 VAC
 - 2). CURRENT: 1 AMPERES MAX PER CONTACT
 - 3). OPERATION TEMPERATURE RANGE: -25°C ~ +70°C
 - 4). CONTACT RESISTANCE: 60M ΩMAX
 - 5). INSULATION RESISTANCE: 1000M ΩMIN
 - 6). DIELECTRIC WITHSTANDING VOLTAGE: 600V AC FOR 1 MINUTE
 - 7). MAX. PROCESSING TEMP: 280°C for 30 SECONDS

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I/O

PART NO:		MATERIAL:		深圳市迈睿康科技有限公司	
LOT NO:		FINISH:			
UNIT: MM	SIZE: A4	COLOR:		TITLE: MICRO SIM CARD 6P 带档 1.5H 成品图	
TOLERANCES: X.X=?.35 X.XX=?.25 X.XXX=?.15		GENERAL ANGLE: X.X=?.0° X.XX=?.0°		DR: PENTIUM 10-16/14	DWG NO: MRK-SM03-150-0010
APP: wenchengyong		SCALE: 1:1	SHEET: 1 OF 1	REV: B/0	