
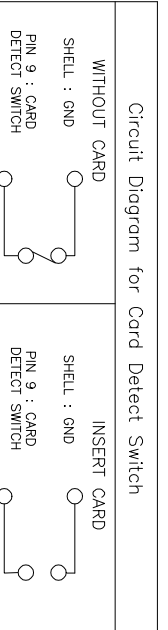
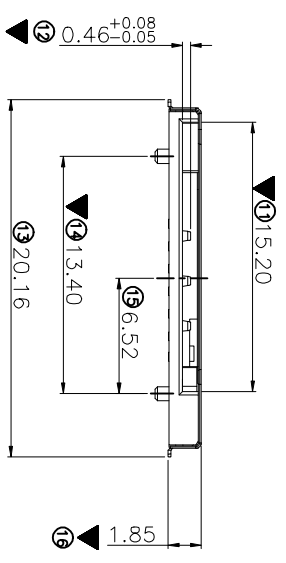


REV.	ECH.N.O.	MODIFY:CONTENT	DATE
A0		NEW	2017/10/30

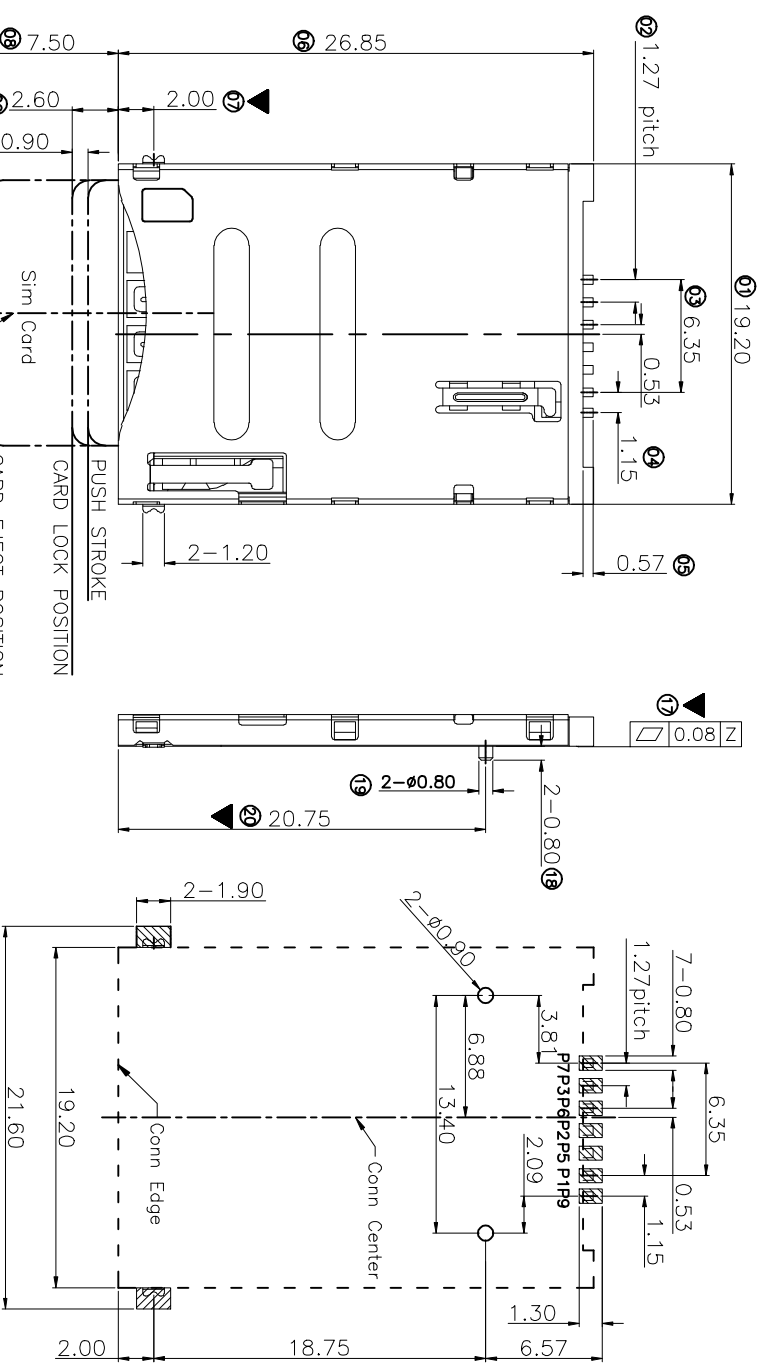

Specification:

- \*Electrical Characteristics:
- Current Rating:0.5A.
- Withstanding Voltage:AC500V r.m.s.
- Insulation Resistance:1000Megohms Minimum at DC 500V
- Contact Resistance:100Milliohms Maximum.
- \*Mechanical Characteristics:
- Mating Cycles:5000 Insertions.
- \*Environmental:
- Operating Temperature:-40To+60°
- \*Material:
- 1.Housing:HI-Temp plastic UL 94V-0 Rated.
- 2.Contact:Copper Alloy.
- 3.Shell:SUS.
- \*Finish :
- 1u" Gold plated on contact area,100u"Min Tin plated on solder tails, Base Nickel :50u"Min
- \*Packing:
- Number of connectors:750Pcs/REEL
- \*Measure:
- ▲Marked as the key test of QC and IPQC
- ⊗Marked as FAI test size
- \*PART NO.

Connector terminal NO.	Pin NO.
Pin 1	VCC:PWR signal and GND
Pin 2	RST:Reset signal
Pin 3	CLK:Clocking signal
Pin 5	GND:PWR signal and GND
Pin 6	VPP:Programming Voltage
Pin 7	I/O:Serial date input/output

GENERAL TOLERANCE		DWG NO.	Title		Part NO.
X.±0.20	X.±5°		SIM CARD PUSH PUSH		MRK-SM05-134-0010
X.±0.15	X.±2°		(6+1PIN) 推13.4		
.XX±0.08	.XX±.1°				
XXX±0.05	.xxx'±0.5°				
SHEET	1/1				

深圳市迈睿康科技有限公司