

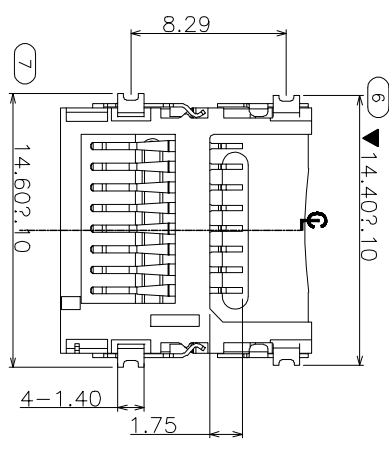
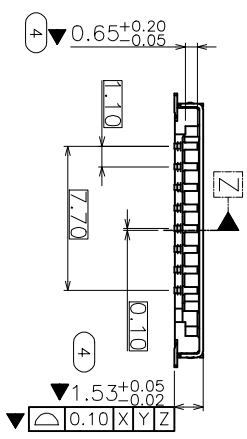
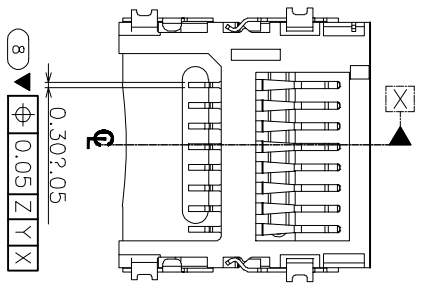

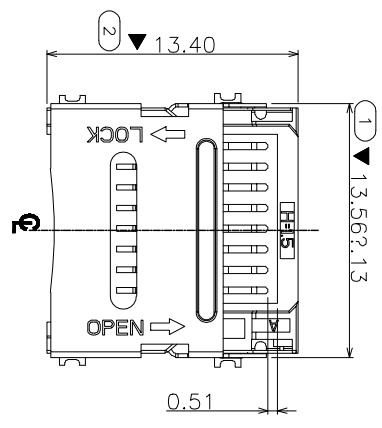
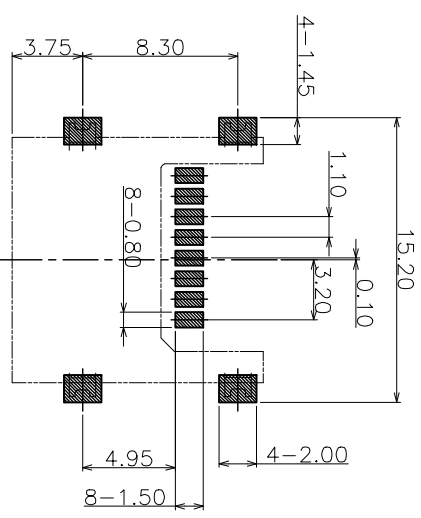


ROHS HSF

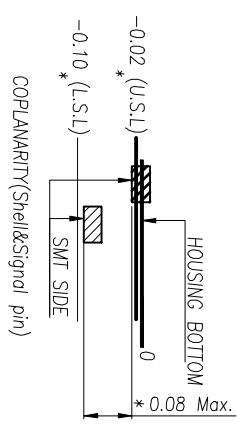

- NOTES:
- 1)- FINISH:
1-1-CONTACT: Au 1u" PLATING ON CONTACT AREA, 100~200u" Sn PLATING ON SOLDER TAILS, 50u" NICKEL UNDERPLATING VOER ALL;
1-2-SHELL: NO PLATING;
 - 2)- PRODUCT SPECIFICATIONS:
2-1-VOLTAGE RATING: 100V
2-2-CURRENT RATING: 0.5A
2-3-INSULATION RESISTANCE: 1000 MEGOHM MIN
2-4-CONTACT RESISTANCE: 100 MILLIOHM MAX
2-5-OPERATION TEMPERATURE: -20° TO +85°
3-6-DURABILITY: 5000 CYCLES
 - 3)- DIMENSIONS WITH MARK "M" MUST BE MEASURE BY QC AND IPCG

General	Angle	设计	设计
X±0.50	X'±2°	DESIGN	fzp
X±0.30	X'±1°	CHECK	wangyong
.XX±0.20	.XX'±0.5°	CHECK	wangyong
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO.	wangyong
变更	变更	变更	变更
CHANG	CHANG	CHANG	CHANG
NO.	NO.	NO.	NO.
REV	DATE	说明	DESCRIPTION
A	13'/11/30	新发行	
B	13'/12/30	修改镀壳材料厚度为0.20	
C	16'/05/25	修改镀壳长度	
工程变更通知单号 ECN(DCN) NO.			

深圳市迈睿康科技有限公司

PRODUCT SPEC. T	*
TITLE:	TE 连接器 高度 H=15
PART NO.	MRC-TF01-150-0000
FILE NAME:	
SCALE	1:1
UNIT:mm	A4
SHEET:	1 of 1