




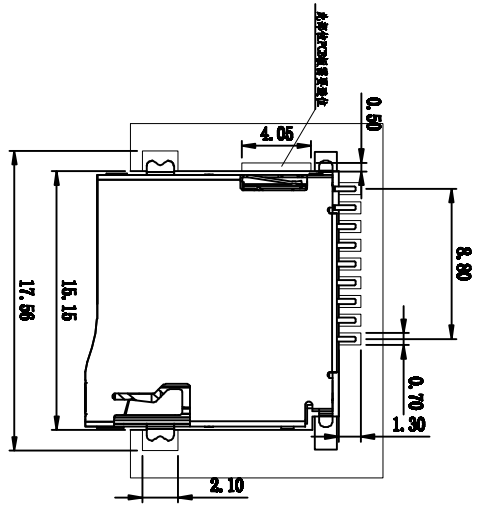
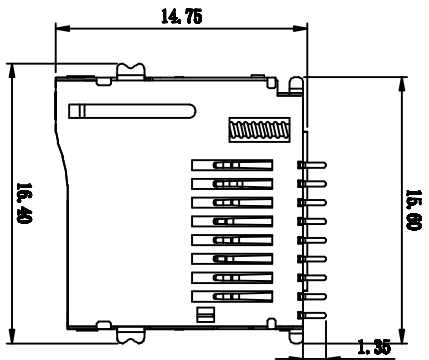
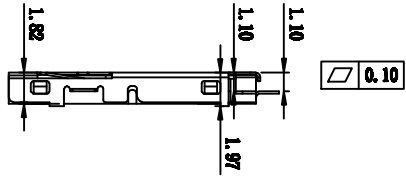


REV. NO./版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名
A		2013.08.06	KELLY

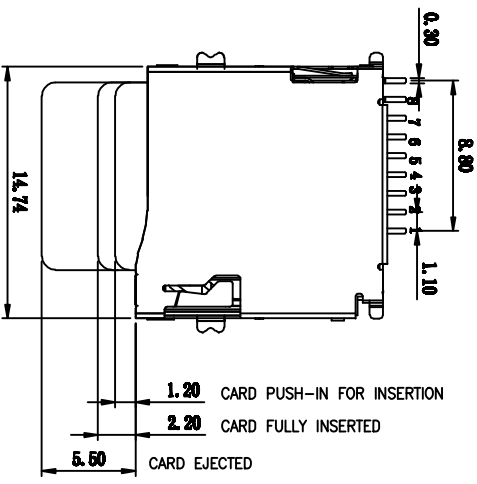

Pin No.	Pin assignment	Pin No.	Pin assignment
1	DATA2	5	CLK
2	CD/DAT3	6	VSS
3	CMD	7	DAT0
4	VDD	8	DAT1



**Specification**

**\*Electrical Characteristics:**  
 Contact Current Rating: 0.5 Amperes.  
 Dielectric Withstanding Voltage: AC500V r. m. s.  
 Insulation Resistance: 1000 MΩ Minimum.  
 Contact Resistance: 40 mΩ Maximum.

**\*Environmental:**  
 Operating Temperature: -25° C +85° C.  
 \*Environmental:  
 Making Cycles: 5,000 Insertions.  
 \*Mechanical Characteristics:  
 Card Push Insertion/Out Force: 0.7~1.20kgf.

**\*Material:**  
 Insulator: HI-Temp Plastic UL 94V-0 Rated.  
 Contact: Copper Alloy (±0.15mm).  
 Shell: Stainless Steel (±0.15mm).  
 Spring: SMP.

DESIGNED	DESIGNED	DATE	DATE
CHECKED	CHECKED	APPROVED	APPROVED
SCALE	SCALE	<b>深圳市迈睿康科技有限公司</b> 市场部 零件编号 MARK-TRF09-182-0018	
UNIT: DIM		TITLE: 天外牌SPIN反读卡1.1	
SCALE: 比例 1:1		PART NUMBER: 零件编号	
SHEET: 页码 1/1		DRAWING NUMBER: 图样编号	