
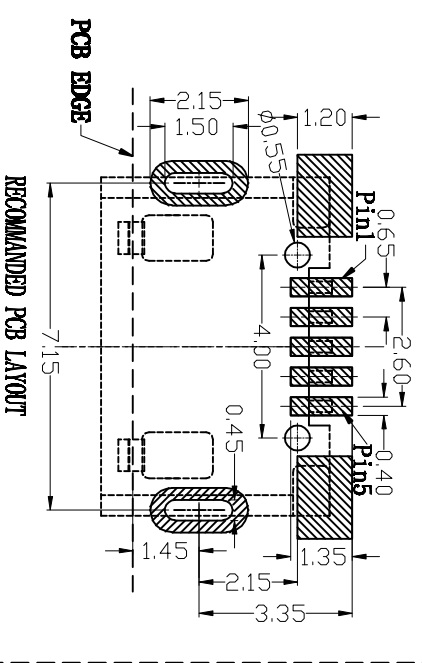
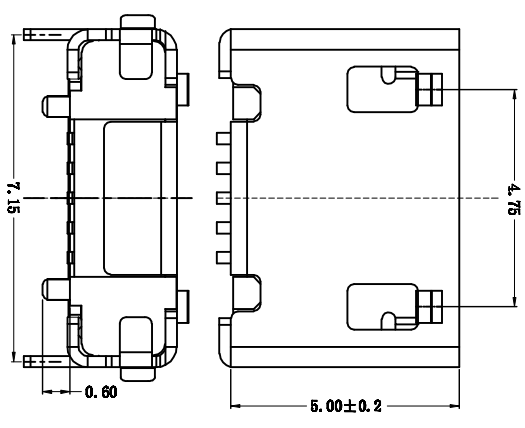
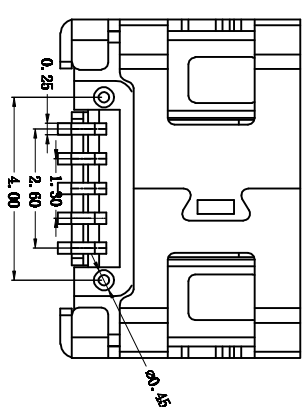
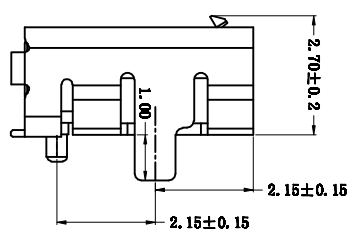
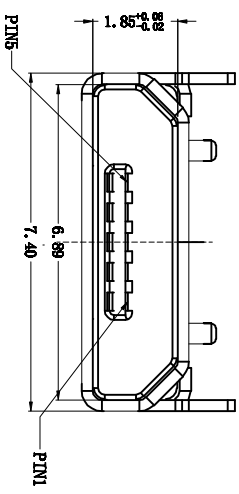


MARK	DATE	ECN NO.	DESCRIPTION	REV.	DESIGN
△					

- 备注:**
1. 产品规格:
 - 1-1. 输入力: 35N MAX
 - 1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER
 - 1-3. 额定电流: 1.0A
 - 1-4. 额定电压: 30V
 - 1-5. 耐久性: 10000 Cycles
 - 1-6. 额定电压: 100V AC MIN
 - 1-7. 接触电阻: 50mΩ MAX
 - 1-8. 绝缘电阻: 100MΩ MIN
 - 1-9. 工作温度: -30° TO +80°

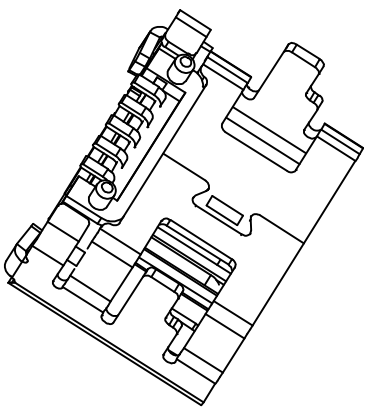

① 端子	PR-0226	1SET	C2680H, T=0.15, 镀全金
② 主体	PR-0501	1PCS	CP+30%GF(黑色), UL94-V0; C2680
③ 规格	PR-0228	1PCS	C2680H T=0.25mm 镀雾锡或可焊锡
零件	图号	数量	规格

深圳市迈瑞康电子有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG	TOL	DIM	TOL
.X	±5.0'	.X	±0.10
.XX	±3.0'	.XX	±0.05
.XXX	±2.0'	.XXX	±0.03

材料	日期	产品名称	UNIT	SCALE	PAGE	REV
设计		MICRO USB B TYPE SMT母座成品 (前插7.15mm带柱)	mm	1:1	1/1	A0
审核		MRK-MU11-720-0031				
验证						
批准						
APPROVED						