


P.C.B LAYOUT
 TOLERANCE: ± 0.05

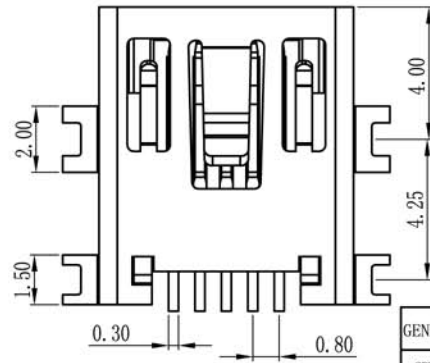

备注:

1. 材料:

铜壳: 青铜 T=0.40mm

端子: 磷铜 T=0.2mm

塑胶: PA9T

2. 电镀:

端子镀半金锡, 铜壳镀 Ni²⁺100 u "

端子镀金 u" 数根据客户需要

3. 毛边最大不得超过: 0.03MM

4. 电气:

Contact Current Rating: 1.0 Amperes.

Dielectric Withstanding Voltage:

AC 100V 0.5mA/60S Min.

Insulation Resistance: 100 Megohms
 Min at DC 500V.

Contact Resistance: 50 Milliohms Max

Operating Temperature: $-55^{\circ} \text{C} \sim 105^{\circ} \text{C}$

GENERAL TOLERANCE				UNITS		深圳市迈瑞康电子有限公司		
SELECT	TOL	1	2	3	mm	TITLE: MINI USB 5P FEMALE SMT B TYPE 沉板式		
GN.		1	2	3	MAT'L	DWG NO. MRK-US09-050-0006		
X.XXX	\pm	0.10	0.05	0.15	NONE	APPD: Skila	SCALE	
X.XX	\pm	0.15	0.13	0.25	FINISH	CHKD: Carry	SHEET	REV
X.X	\pm	0.20	0.25	0.5	NONE			
X.	\pm	0.30	0.38	1.00	Q'TY			
					NONE			