
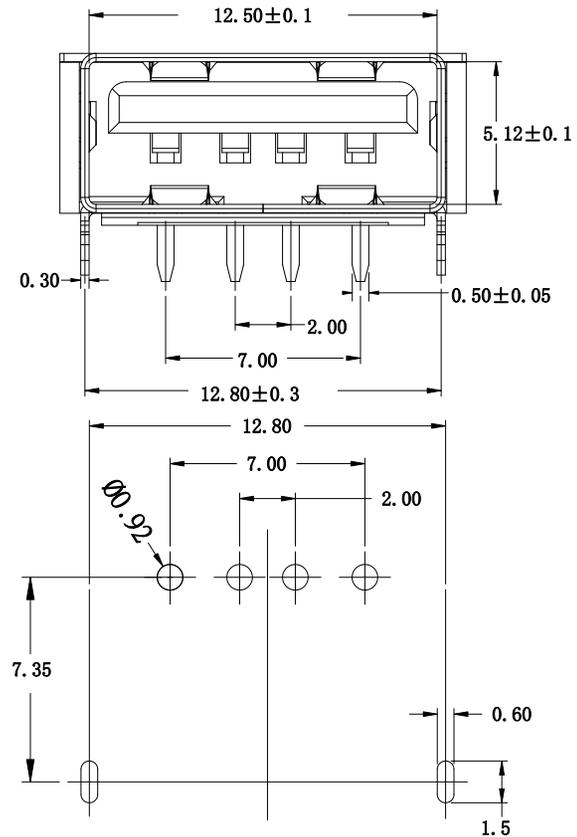
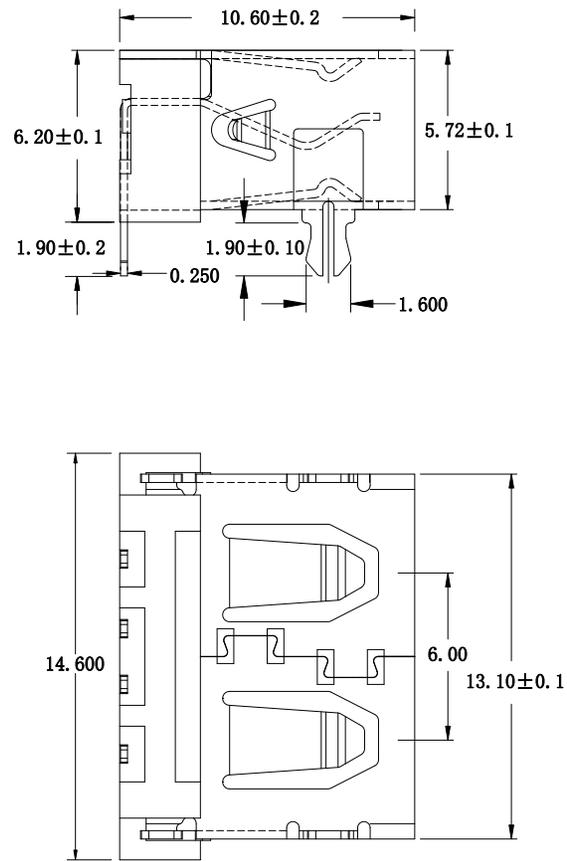


文件类型: 产品图面



- Specifications:
- Electrical:
- Current Rating
1.5A/contact terminal
 - Voltage Rating
30V DC
 - Contact Resistance
30 milliohms MAX
 - Dielectnc Withstanding Voitage:
500 V AC AT Sea Level
 - Lnsulation Resistance:
1000MEGA ohms MIN
- Mechanical:
- Cnector Mate and Unmate Force
Mate force:3.75kgf (MAX)
Unmate force:1.02kgf (MIN)
 - Terminal Retenion
1.2kgf (MIN)
- Material:
- Housing:
Hing Temperature Tnermaplastics,
U1 94V-0 PBT/LCP White/Black
 - Contact:Copper Alloy C2680
 - Shell: Copper Alloy C2680/SPCC
- Finish:
- Contact: Plated Gold in Mating Area;
Tin On Solder Talls
 - Shell:
Nickel Plating

UNITS MM	SCALE 1:1	<h1>深圳迈瑞康电子有限公司</h1>			
					
GENERAL TOLERANCE		DR.	TITLE:		
X.	±0.30	Aaron	USB A/F 90° DIP短体二脚鱼叉(10.6)无卷边		
X.X	±0.20	CHK.	Aaron	MAT'L:	DWG NO:
X.XX	±0.10			MRK-US22-100-0024	
X.°	±3°	APPD.	PANYUFENG	DATE:	P
X.X°	±2°			2011.06.28	SIZE A4