
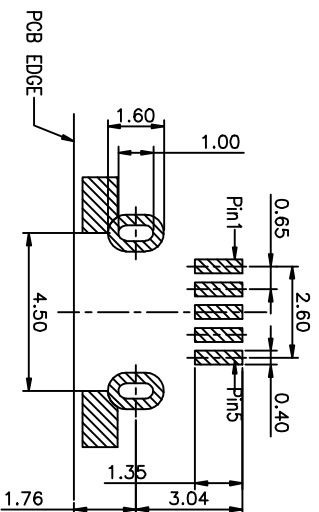
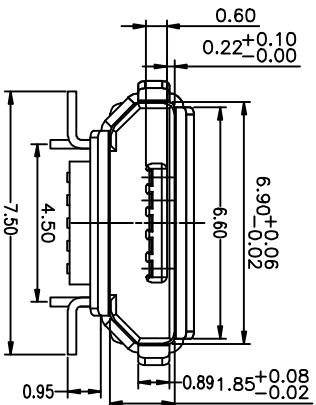
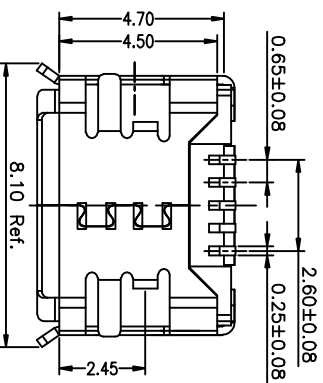

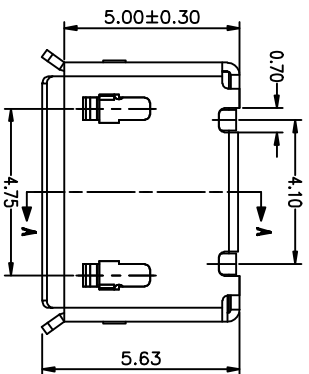



REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE



RECOMMENDED PCB LAYOUT
PCB板参考

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f.I,UL94V-0
 - Contact: copper alloy,t=0.15mm
 - Shell: copper alloy,t=0.25mm
 - Specification:
 - Current rating:1.5PIN 1.8A Max/2,3,4PIN 1A Max voltage: 100 V(ac) for 1 min.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.
 - Temperature range: -30°C~80°C

深圳市迈睿康科技有限公司

Micro USB SS B Type - 垫高0.9mm贴片盲插

PART NO:	A064	MATERIAL:	
MODEL NO:	XX	FINSH:	
UNIT:	MM	SIZE:	A4
TOLERANCE UNSPECIFIED		DR:	
.X	0.15	CHK:	
.XX	0.10	APP:	
.XXX	0.05	SCALE:	5:1
Ang	1°	DATE:	2012.05.22
TITLE:		REV: A	

1 2 3 4 5 6 7 8

F E D C B A