由 Foxit PDF Editor 编辑
版权所有 (c) by Foxit 公司, 2003 - 2010
仅用于评估.

REV.	MODIFICATION	ECN No.	NAME	DATE
A0	新版发行			2017-04-05

NOTES:
1.MATERIAL:
1.1HOUSING: PBT, 蓝色-300C.
1.2TERMINAL: C5191R-H.T=0.20mm.
1.3SHELL: SPCC, T=0.30mm.
2.FINISHING:
2.1TERMINAL:
nU" GOLD PLATED ON CONTACT AREA,
100-120U" Matte-Tin PLATED ON SOLDER AREA
50-80U" NICKEL UNDERPLATED OVERALL.
2.2 Shell: plating NICKEL 80~120u".
3.SPECIFICATION:
3.1ELECTRICAL CHARACTERISTIC:
3.1.1CONTACT RESISTANCE: 30milli-OHMS MAX.
3.1.2DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN.
3.1.3INSULATION RESISTANCE: 1000Mega-OHMS MIN.
3.2.MECHANICAL CHARACTERISTIC:
3.2.1INSERTION FORCE: 35N(3.57KGF) MAX.
3.2.2EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN.
4. 标示" "为重点，首件检验尺寸.

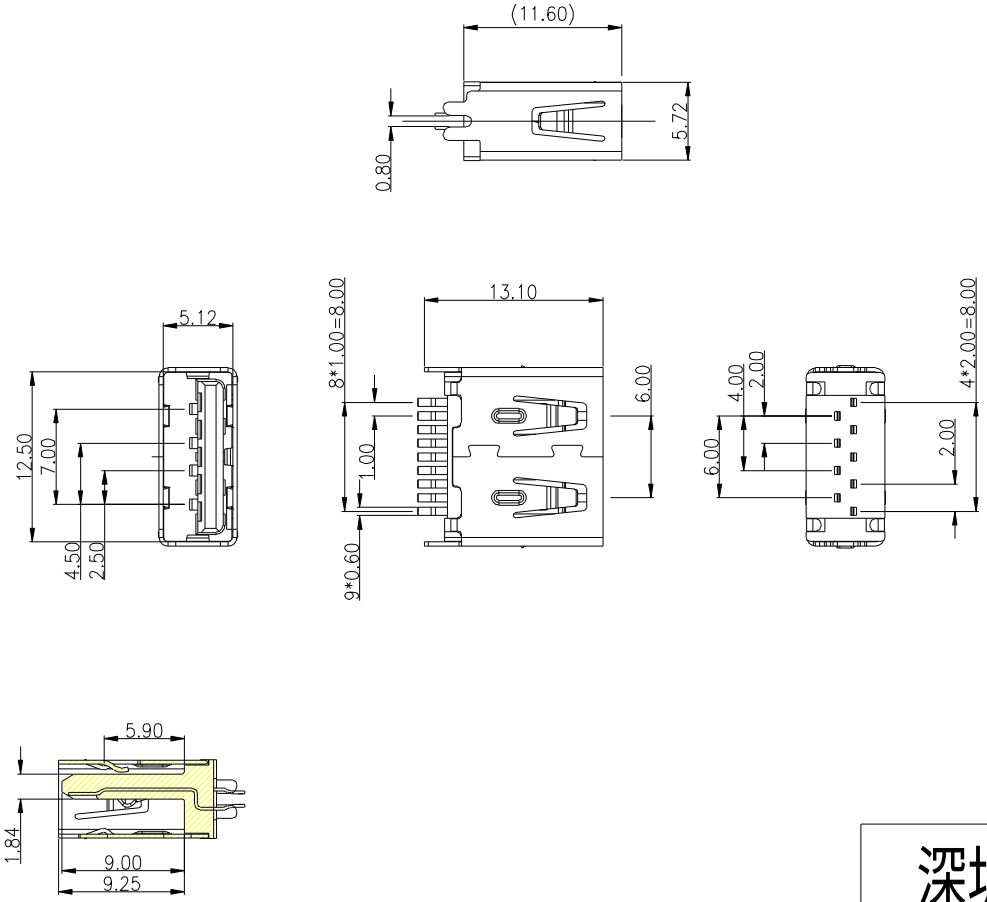

深圳市迈睿康科技有限公司

.X: ±0.25	.X°: ±1.5°	INTENDED USE: MRK-US30-080-0064	TITLE: USB AF 3.0 夹板0.8
.XX: ±0.15	.XX°: ±1.0°		
.XXX:±0.10	.XXX°:±0.5°	APPD.:	PART NO.:
MAT'L.: wert b		CHKD.: Wen	DWG. NO.:
			SCALE: 1:1 / PAGE: 1/1
FINISH:		DR.: WCY	UNIT: mm / REV.: A0