

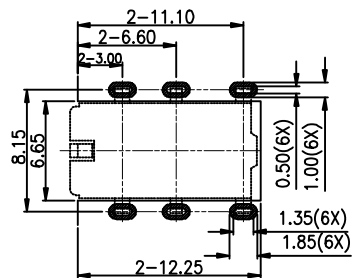
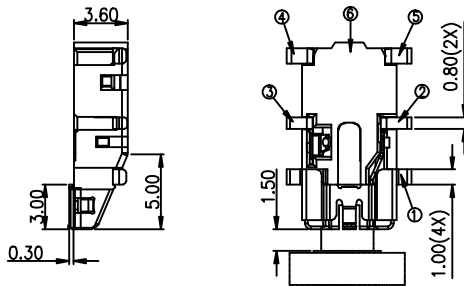




REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE



TOLERANCE ± 0.05
RECOMMEND PCB LAYOUT



PLUG SPEC



SCHEMATIC

序号	产品编号	产品名称	数量	材料	规格	备注
6	PJ-0240-03	Housing	1	PPA		Black
5	PJ-0240-05	Contact E	1	Phosphor Bronze	0.20T	Gold Flash
4	PJ-0240-04	Contact D	1	Phosphor Bronze	0.20T	Gold Flash
3	PJ-0240-03	Contact C	1	Phosphor Bronze	0.20T	Gold Flash
2	PJ-0240-02	Contact B	1	Phosphor Bronze	0.20T	Gold Flash
1	PJ-0240-01	Contact A	1	Phosphor Bronze	0.20T	Gold Flash

主要技术参数	
额定电压	DC 12V/1A
额定电流	<0.05A
绝缘电阻	>100MΩ
耐压	AC500V(50Hz)/1min
插拔力	3-20N
使用环境温度	-40~70℃
使用寿命	10000次

PART NO:	MATERIAL: SEE NOTE
MODEL NO:	FINISH: SEE NOTE
UNIT: MM	SIZE: A4
TOLERANCES UNSPECIFIED	
L ±0.30	Z ±0°
.X ±0.20	.X' ±0°
.XX ±0.10	.XX' ±1°
.XXX ±0.05	

深圳市迈睿康科技有限公司	
DWC NO: MRK-PJ09-080-0074	
TITLE: 3.5 耳机插座	
SCALE: 1:1	DATE: 2014.09.21
DR:	REV: A4
CHK:	
APP:	