

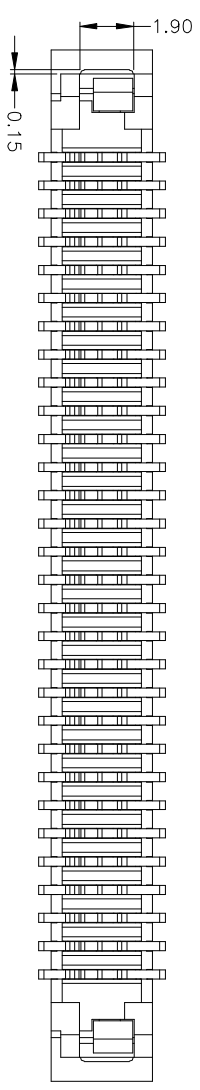


REV.	EGR. NO.	DATE	SIGN	DESCRIPTION
A		20131014		NEW DRAWING

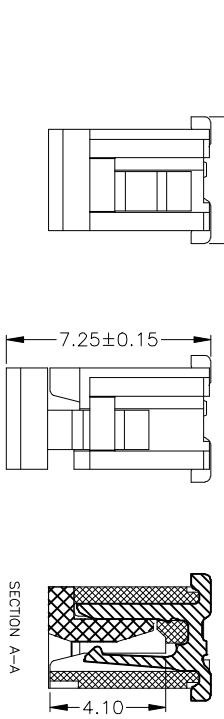


3D VIEW




SECTION A-A

NOTE:

1. Material
- 1.1: Housing: NYLON6 UL94-V0 COLOR: NATURE.
- 1.2: Housing: PPS UL94-V0 COLOR: NATURE.
- 1.3: Contact: Phosphor Bronze.
- 1.4: LFG: Brass.
2. Plating
- 2.1: Contact: Gold Flash or Tin.
- 2.2: LFG: Matte Tin Plating Over Nickel.
3. Rating:
- 3.1: Operating Voltage: 50V AC/DC.
- 3.2: Current Rating: 0.4A AC/DC.
- 3.3: Operating Temperature: -25°C~+85°C.

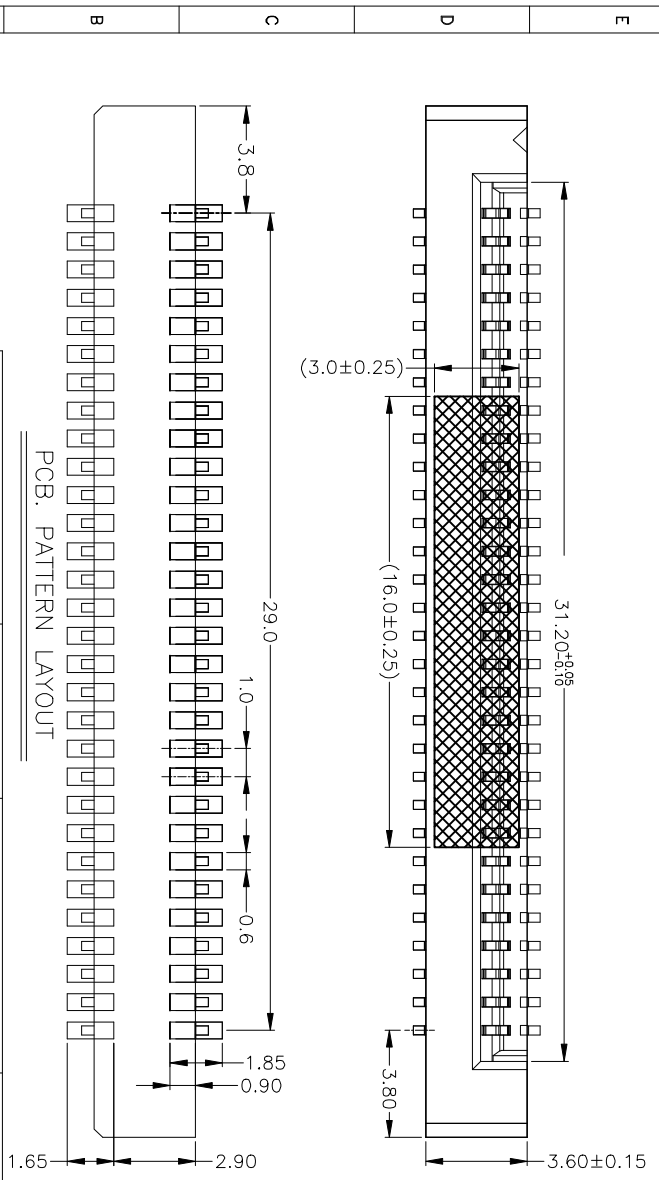

Recommended FPC Dimension

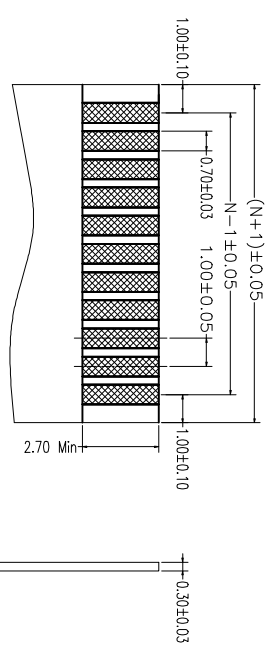

PCB. PATTERN LAYOUT

30PIN 专用

TOLERANCE UNLESS SPECIFIED		DATE	DAR. BY	MATERIAL
LINEAR	ANGLE	20131014	CHK. BY	FINISH
.X ±0.25	.X° ±3°	SCALE 1/1	APP. BY	DWG. NO.
.XX ±0.10	.X° ±2°	UNIT MM		
.XXX ±0.05	.XX°			

深圳市迈瑞康电子有限公司

TITLE: FPC 1.0Pitch 36H SMT CONNECTOR

PART NO. **MRK-FC15-136-0030**